





# K11

Core Alignment



## Benefits and Features

- Wide 5.0-inch Color LCD Monitor with Touch Screen & Bidirectional Operation System
- Powerful lithium polymer battery with large capacity
- User friendly GUI
- Optical Fiber Recognition Capability and LED Lamp in Heater
- Lowest Splice Loss ever in the Industry

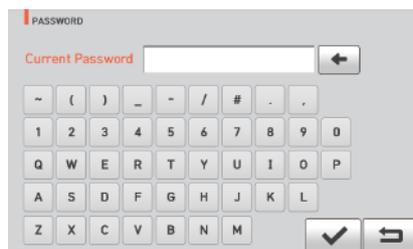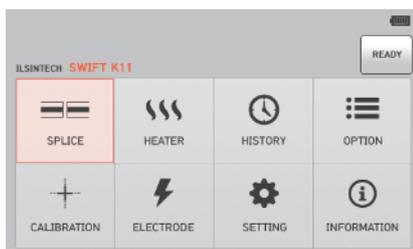

## Specification

CATEGORY	DESCRIPTION
Fiber alignment	IPAAS core to core alignment(Image pattern analysis alignment system)
Applicable type of fibers	0.25mm, 0.9mm, 2.0mm, 3.0mm, 4.0mm, Indoor cable
Fiber count	Single fiber
Applicable fiber dimensions	Cladding diameter: 80~150 $\mu$ m, Coating diameter: 100 $\mu$ m~4mm
Fiber setting and cleaved length	7~16mm
Splicing modes	Splice mode: 300, Heat mode: 100
Typical splice Loss	SM: 0.02dB, MM: 0.01dB, DS: 0.04dB, NZDS: 0.04dB
Return loss	> 60dB (Typical)
Splicing time	Typical 6sec. (Quick Mode)
Sleeve heating time	9sec (IS-45 Sleeve, IS-45 mode), 13sec (IS-60 Sleeve, IS-60 mode)
Applicable protection sleeve	40mm, 60mm, 32mm or 28mm for SOC
Storage of splice result	The last 10,000 results to be stored in the internal memory.(Image 10,000 results)
Tension test	1.96N ~ 2.25N
Operating condition	Altitude: 5,000m above sea level, Temperature: -10 $^{\circ}$ C~50 $^{\circ}$ C, Humidity: 0~95%, Wind: 15m/s, non-condensing, dust proof, water proof, shock proof
Storage condition	Temperature: -40 $^{\circ}$ C~80 $^{\circ}$ C, Humidity: 0~95%
Dimension	143(W) x 163(L) x 140(H)mm (Without Bumper)
Weight	With battery 2.25kg
Viewing method and display	Two CMOS cameras and 5.0-inch color touch LCD
Fiber view and magnification	X/Y : 200X, Max 400X
Power supply	DC Lithium polymer battery (DC 14.8V, 4700, 6000mAh-option), 100~240V AC Charger
No. of splice/heating per battery full charge	Typical 250 cycles / More than 350 cycles(K11-6000)
Electrode life	More than 3,500 times
Terminals	USB

## Standard Package

CATEGORY	MODEL	Q'ty
Optical fiber sealer	SWIFT K11	1
Battery	K11-4700	1
AC Adapter	WDS060190	1
Instructions for use	-	1
Spare electrode	EI-23	1pair
Transporting Case	Hard Case	1
Cooling Tray	CT-01	1
Screw Driver	LD-3300	1
USB Cable	-	1
DC Output Cable	-	1
Manual Stripper	CF-02	1
Alcohol Dispenser	PP	1
Tool Box	-	1
Sleeve Loader	S312	2
Cleaver	CI-03BT	1

## Option Package

CATEGORY	MODEL
Battery	K11-4700 / K11-6000
Cleaver Blade	BI-07
Electrode	EI-23
Work Belt	-
Sleeve	S-160(60mm), S-140(40mm)
Sleeve Clamp	SC-01
SOC Connector	SC, LC, FC, ST(Refer to FTTx Solution catalogue)
Optical Fiber Holder	HS-250, HS-900, HS-2.5F, HS-IN, HS-SC/FC, HS-ILC, HS-ST, LS-900(Loose)
External Power	DC 12V Available for car cigar jack

\* Design, standard/optional package and specification shown above are subject to change with or without notice.

### ILSINTECH KOREA

#39, Techno 3-ro, Yuseong-gu, Daejeon, Korea (Zip. 305-509) | Tel +82 42.671.5610 | Fax +82 42.671.5612 | sales@ilsintech.com

**USA** 4230 LBJ Freeway, Ste.149 Dallas, TX 75244 | (+1) 972 556 0916

**INDIA** ILSintech Trading India Pvt.Ltd 621, Devika Tower, Nehru Place New Delhi 110019 | (+91) 11 4055 5954, (+91) 11 4056 7229

**CHINA** Room 101 Li Ming Building, No111 Gui Qing Road Xuhui District, Shanghai, China | (+86) 21 5836 0950

**RUSSIA** Office 401(Kotra) 4F Hotel "Korston" 15 st. Kosygina, Moscow, Russia | (+7) 985 9111987

**EUROPE** Zirovnicka 2/2389 106 00 Prague 10, Prague, Czech Republic | (+420) 725 001 757

**INDONESIA FACTORY** Dusun 02 Blok Babakan RT01/Rw03, Desa Sukaraja Wetan, Jatiwangi, Majalengka, Jawa Barat, Indonesia